

Panel Specifications

Electrical:

1000 Lux: 0.905mA at 2.1V (1.90mW)<sup>1</sup>  
 200 Lux: 0.181mA at 1.6V (0.289mW)  
 Max Voc: 3.7V (Direct Sunlight)  
 Average Isc: 156mA (Direct Sunlight)<sup>1</sup>


Mechanical:

f/b Laminate: 3 mil PET / 3 mil PET  
 3/16 in (4.76 mm) Copper Foil Busbar  
 Thickness: 0.2-0.3mm  
 Appr. Weight: 1.70 grams  
 Operating Temperature: -25C to 65C<sup>2</sup>  
 Bend Radius: 1 inch fixed, 3 inch repetitive<sup>3</sup>  
 UV and Moisture Protection: Limited<sup>4</sup>

REVISIONS

DRAWING NO.  
LL200-2.4-75

REV	DESCRIPTION	REVIEW	DATE
1	2 Cell 73 x 94 mm Tandem Low Light Module	DS	12/2/2020

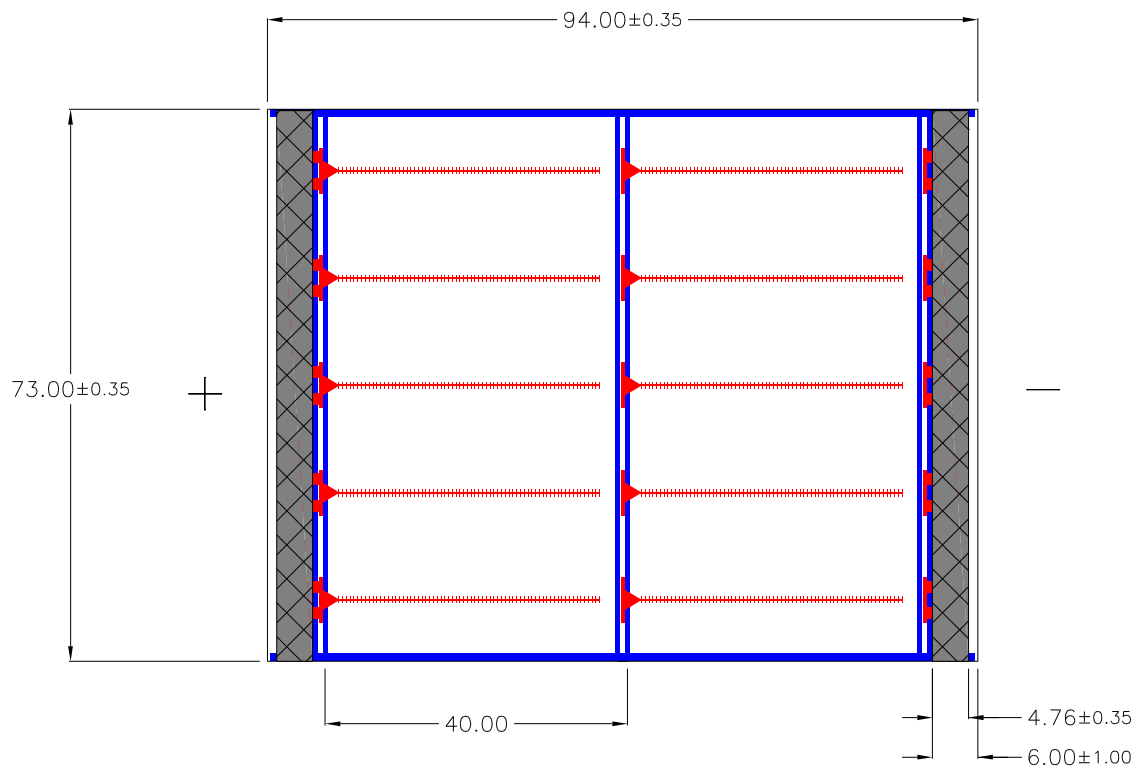

1. Tested under a cool white LED spectrum. Extended exposure to direct sunlight can reduce panel performance.
2. High temperature laminates available for up to 85C continuous, 100C peak (4 hours daily).
3. Contact engineering support for tighter flexing requirements
4. Tolerant to intermittent exposure to UV, moisture and weather. Full UV and weatherproofing options are available

This document contains information which is the property of PowerFilm Inc. It is not to be duplicated, used, or disclosed in whole or in part for any purpose without prior written permission of PowerFilm Inc. All Dimensions +/- 1.2 mm unless specified.

**PowerFilm Inc.** 1287 XE Place  
 Ames, IA 50014  
 515-292-7606  
 515-292-1922(fax)

TITLE  
2 Cell 73 x 94 mm Tandem Low Light Module

SCALE 1:1 DATE: 12/2/2020 REF.

DRAWN Sam Jones DRAWING NO.  
 CHECKED LL200-2.4-75

UNITS: mm