

Panel Specifications


Electrical:

100% Sun: 240mA at 7.2V (1730mW)<sup>1</sup>  
 25% Sun: 54mA at 7.2V (389mW)  
 Max Voc: 11.1V  
 Average Isc: 308mA

Mechanical:

f/b Laminate: 10 mil PET / 10 mil PET  
 3/16 in Copper Foil Busbar  
 Thickness: 0.2–0.3mm  
 Appr. Weight: 28.9 grams  
 Operating Temperature: –25C to 65C<sup>2</sup>  
 Bend Radius: 1 inch fixed, 3 inch repetitive<sup>3</sup>  
 UV and Moisture Protection: Limited<sup>4</sup>

REVISIONS		DRAWING NO. MP7.2–150F	
REV	DESCRIPTION	REVIEW	DATE
1	6 Cell 254 x 146 mm Tandem Module	SJ	1/20/2021

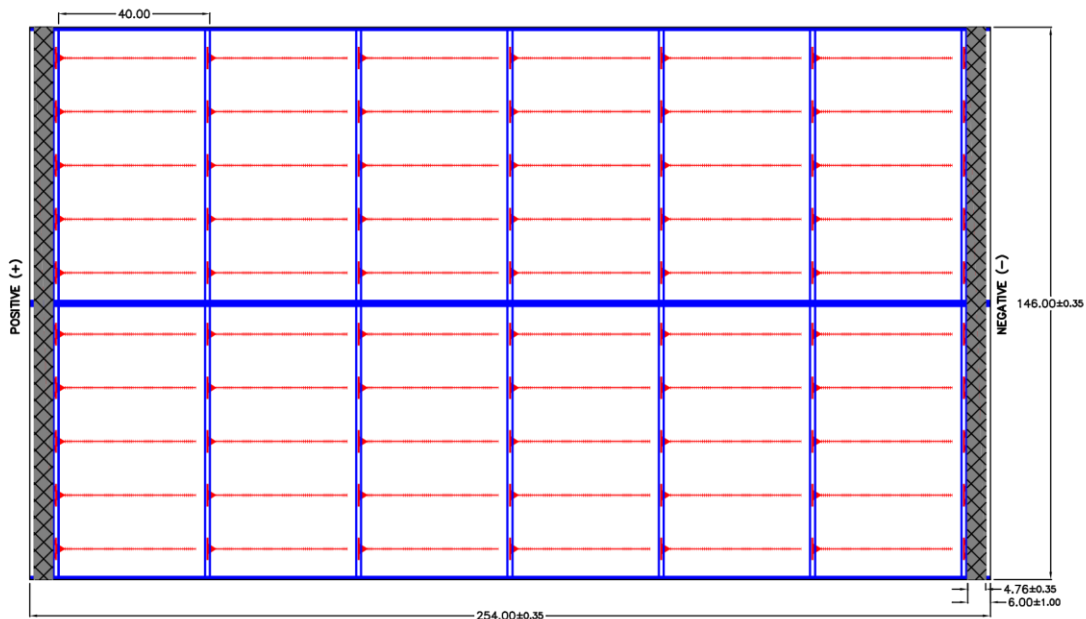

1. Tested at STC under AM1.5 1000W/m<sup>2</sup> equivalent conditions
2. High temperature laminates available for up to 85C continuous, 100C peak (4 hours daily).
3. Contact engineering support for tighter flexing requirements
4. Tolerant to intermittent exposure to UV, moisture and weather. Full UV and weatherproofing options are available.

This document contains information which is the property of PowerFilm Inc. It is not to be duplicated, used, or disclosed in whole or in part for any purpose without prior written permission of PowerFilm Inc. All Dimensions +/- 1.2 mm unless specified.

PowerFilm Inc.		1287 XE Place Ames, IA 50014 515–292–7606 515–292–1922(fax)	
TITLE 6 Cell 254 x 146 mm Tandem Module			
SCALE 1:2	DATE 1/20/2021	REF.	
DRAWN John Fecht		DRAWING NO. MP7.2–150F	
CHECKED			

UNITS: mm

# MP7.2-150F

- 1000W/m<sup>2</sup>
- - 250W/m<sup>2</sup>

